
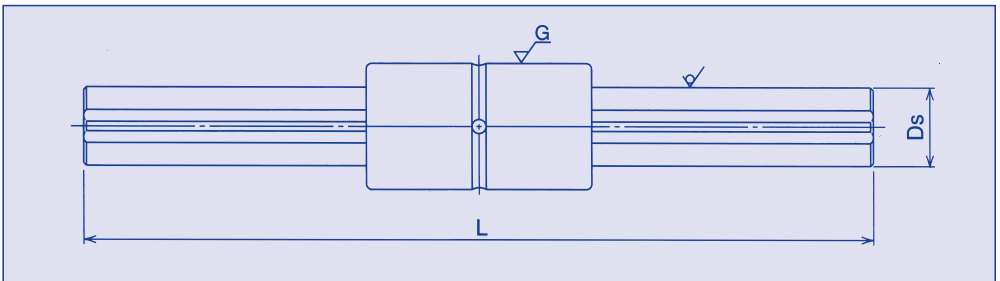


BALL SPLINE

COMMERCIAL BALL SPLINE

Material: Carbon Steel
Add SS to P/N for Stainless Steel

New

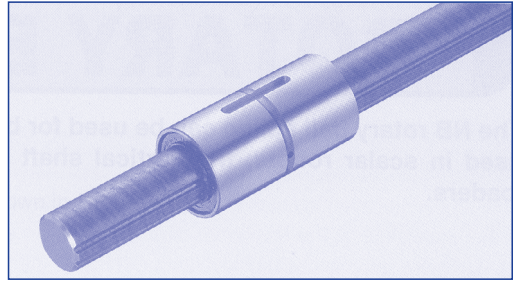

P/N Cylindrical Type Nut	P/N Flange Type Nut	P/N Block Type Nut	Major Dimensions						
			Ds mm	Standard Length L mm					
				500	1,000	2,000	3,000	4,000	5,000
MYC-A2-1	MYC-A2-6	MYC-A2-11	18.2	500	1,000	2,000	3,000	4,000	5,000
MYC-A2-2	MYC-A2-7	MYC-A2-12	23	500	1,000	2,000	3,000	4,000	5,000
MYC-A2-3	MYC-A2-8	MYC-A2-13	28	500	1,000	2,000	3,000	4,000	5,000
MYC-A2-4	MYC-A2-9	MYC-A2-14	37.4	500	1,000	2,000	3,000	4,000	5,000
MYC-A2-5	MYC-A2-10	N/A	47	500	1,000	2,000	3,000	4,000	5,000

- * tolerance of total length and length of splined portion
total length less than 4000: JIS B0405 coarse grade
total length greater than 4000: +/- 5.0mm

Please specify for tolerances other than those above.

- * When a commercial shaft is used, the rated load for the nut is about 70% that indicated in the dimensional tables.

Must specify spline shaft length

